



Pipe Drivers NDG / AND


The entire outside surface of a tubular workpiece can be tooled with one single clamping and high torque transmission.

By means of a pipe driver, large clamping areas can be covered.

Type NDG pipe driver



Clamping principle

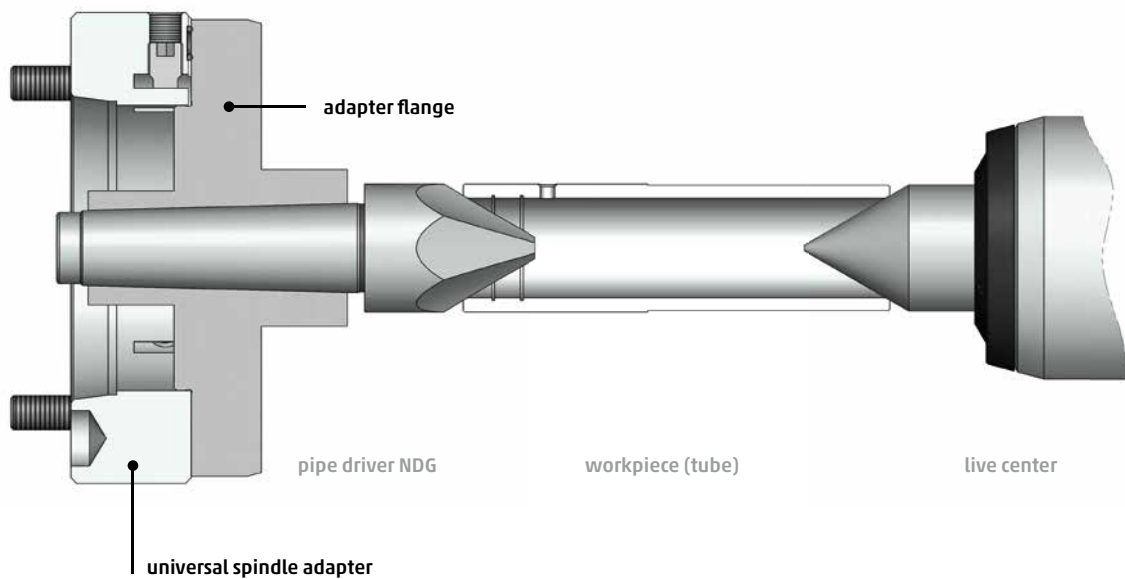


NEIDLEIN pipe drivers NDG and AND ensure:

- high torque transmission, thus achieving a high rate of metal removing
- finishing of outer surface by clamping » saving of time
- extended service life of driving chisels
- easy handling
- large clamping area of tubular workpieces 2 - 155 mm bore-diameter


Technical data – type NDG pipe driver

type NDG	morse taper	D	d1	L	L1	L2	L3	a	chisel pcs	for bore-Ø from to	cat. no.
0/15	2	18	0	100	32	4	68	60°	6	2 17	750 01
0/30	3	31	0	135	50	5	85	60°	6	2 30	750 02
10/40	3	45	8	145	60	5	85	60°	6	9 43	750 03
20/60	3	63	18	147	62	5	85	60°	8	19 60	750 04
10/40	4	45	8	168	60	6	108	60°	6	9 43	750 05
20/60	4	63	18	170	62	6	108	60°	8	19 60	750 06

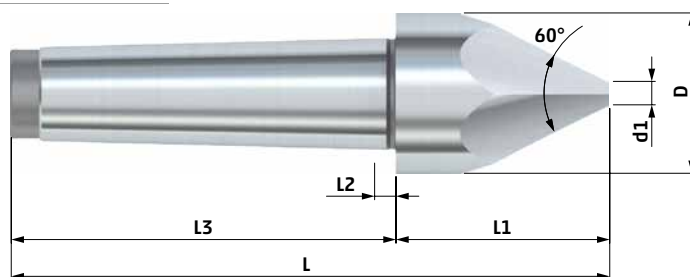

Technical data – type NDG drive cone exchangeable

type NDG	D	d1	d2	L	L1	a	chisel pcs	for bore-Ø from to	cat. no.
35/90	93	32.8	35	70	46	60°	10	33 90	751 01
90/155	158	88	35	75	46	60°	10	88 155	751 02

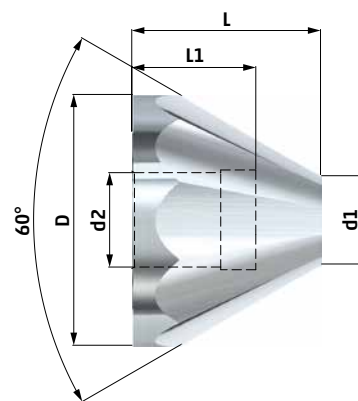

Technical data – type AND arbor

type AND	morse taper	D	d2	L1	L2	L3	L4	cat. no.
35/4	4	46	35	36	16	5	108	752 01
35/5	5	44.5	35	36	16	5	130	752 02
35/6	6	64	35	36	16	5	144	752 03

